


Standards :

- ISO 8820-5 : 2007

Packaging :

- 400pz

Example Strip fuse-links time-current curve (SF51 175A) :

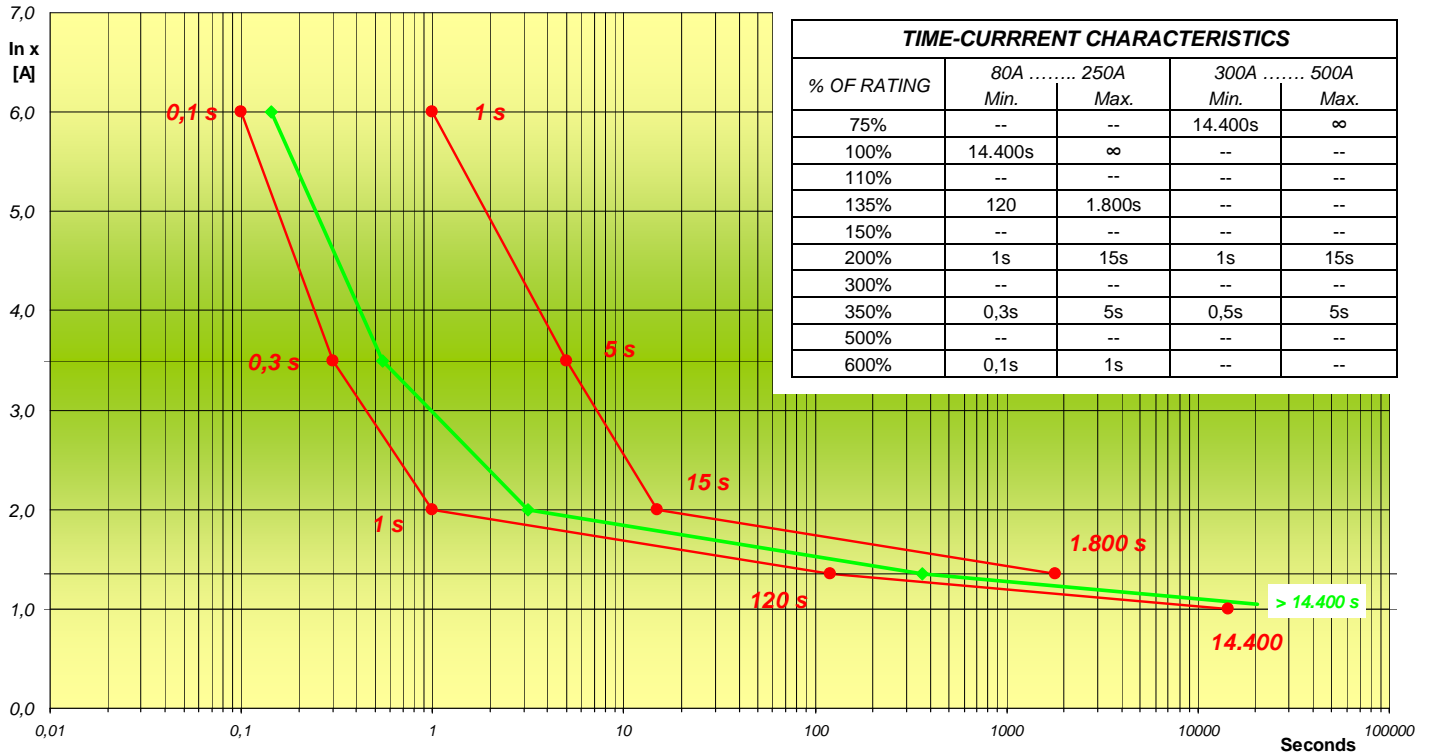

AΩ Part. No	Rated current	Rated voltage	Nominal cold resistance	Colour	Voltage Drop max.	Breaking capacity
80.080.0	80A	32V	0,66mΩ	Red	110mV	2000A 32V DC
80.100.0	100A	32V	0,56mΩ	Yellow		
80.125.0	125A	32V	0,41mΩ	Green		
80.150.0	150A	32V	0,37mΩ	Orange		
80.175.0	175A	32V	0,29mΩ	White		
80.200.0	200A	32V	0,27mΩ	Blue		
80.225.0	225A	32V	0,22mΩ	Light brown (tan)		
80.250.0	250A	32V	0,21mΩ	Pink	80mV	Leakage current I _{max} : 0.5mA
80.300.0	300A	32V	0,19mΩ	Grey		
80.350.0	350A	32V	0,15mΩ	Dark green		
80.400.0	400A	32V	0,13mΩ	Violet		
80.450.0	450A	32V	0,12mΩ	Gold		
80.500.0	500A	32V	0,11mΩ	Brown		